

1

2

3

4

A





B

C

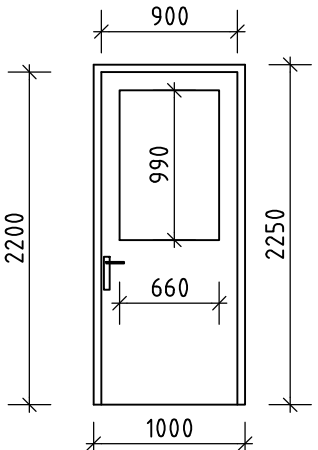
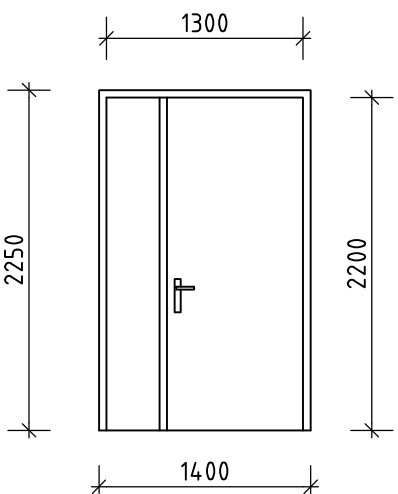
D

E

F

		NUVIA a.s. Modřínová 1094, 674 01 Třebíč, Česká republika		Document number Project number Index:				Released: Revision:			
 ÚJV Řež, a. s. Division  ENERGOPROJEKT PRAHA				Workplace Na Žertvách 2247/29, 180 00 Praha 8							
Construction-action ESS - BEER				Managing Department 2505				Processing Department 2503		Cancellation sym. V10	
Job title Documentation for diffractometer BEER DETAIL DESIGN, Part B - Civil part				Object - operation unit CO 101				Serial number 016			
Drawing title <b>C0 101 - BEER EXPERIMENTAL CAVE AND CONTROL HUTCH AREA          LIST OF DOORS AND WINDOWS</b>								Degree of prot. Copy no.			
Prepared by Filip Dufek		Head of processing department Ivan Holub		Date 10/2018		Scale 1:50					
Checked by Zdeněk Vaněček		Main project engineer Jiří Petřů		File 016_List of doors.DWG		Size A 4 / 5 x A4					
Job number 27-5356-30-001				Archive number <b>EGP 5043-D-181796</b>				Index A		Sheet	

# LIST OF THE DOORS

TERM	DESCRIPTION SCHEMA, DIMENSION	NO. PCS			COATING	NOTE
		3,000	1	TOTAL	HUE	
1	2	3	4	5	6	7
1 D	<p>ONEWING ENTRANCE DOOR, DOOR DIMENSION 900x2200 mm, BUILDING HOLE 1000x2250 mm, RIGHT OPENING, PARTLY GLAZED</p>  <p>OTHER PARAMETERS:          - ALUMINIUM DOOR FRAME, SURFACE FINISH KOMAXIT          - ALUMINIUM DOOR WING          - GLASS: HARDENED GLASS, DOUBLE GLASS 4-16-4 mm, GLASS DIMENSIONS 990x660 mm          - FITTING: HANDLE/HANDLE          - LOCK: DOOR PLUG FAB</p>	1		1	ALUMINIUM DOOR RAL 6032 - SIGNAL GREEN ALUMINIUM DOOR FRAME LIKOS RAL 9005 - BLACK	
2 D	<p>TWO-WING INTERNAL DOOR, DOOR DIMENSION 1300x2200 mm, CONSTRUCTION HOLE 1400x2250 mm, MAIN DOOR WING WIDTH OF 900 mm, RIGHT, FULL, ROTARY, SECONDARY WIDTH OF 400 mm, LEFT, FULL, ROTARY</p>  <p>OTHER PARAMETERS:          - ALUMINIUM DOOR FRAME LIKOS, SURFACE FINISH KOMAXIT          - DOOR WING HPL - LAMINATE          - FITTING: HANDLE/HANDLE          - LOCK: DOOR PLUG FAB</p>	1		1	DOOR HPL - LAMINATE RAL 6032 - SIGNAL GREEN ALUMINIUM DOOR FRAME RAL 9005 - BLACK	

Prepared by M. Šaár

Checked by Z. Vaněček

File 016\_dd\_list of doors\_windows\_civil\_nik6.6.a.dwg

Drawing title

LIST OF DOORS AND WINDOWS

Drawing type

STAR



**ÚJV Řež, a. s.**  
Hlavní 130, Řež  
250 68 Husinec

**ENERGOPROJEKT PRAHA**

Archive no.

5043-D-181796

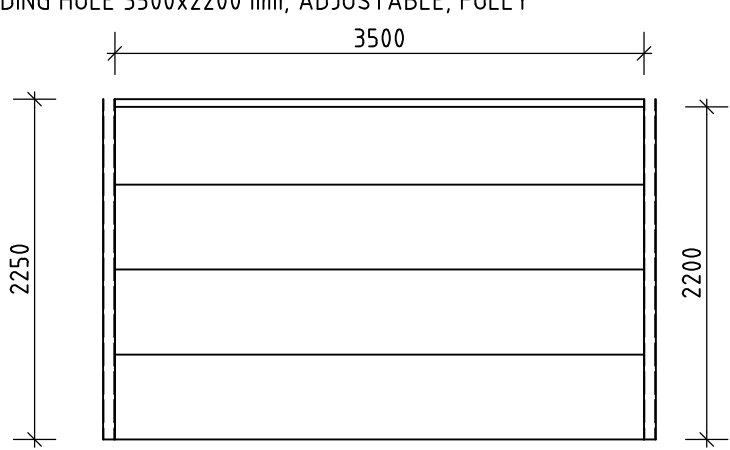
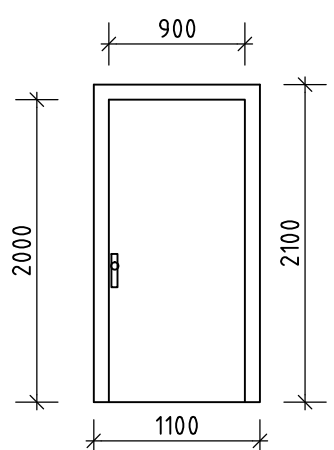
Sheet

2/5

Index

A4 1A4 297x210

# LIST OF THE DOORS

TERM	DESCRIPTION SCHEMA, DIMENSION	NO. PCS			COATING	NOTE
		-3,000	-1,500	TOTAL	HUE	
1	2	3	4	5	6	7
3 D	SECTIONAL GARAGE DOOR HÖRMANN, DIMENSION 3500x2250 mm, BUILDING HOLE 3500x2200 mm, ADJUSTABLE, FULLY  <p>OTHER PARAMETERS:            - STEEL GUIDE PROFILE            - LAMELLAS FROM EXTRUDED ALUMINIUM WITHOUT INSOLATION LTE 42            - FITTING: VARIATION N            - LOCK: RATCHET LOCK            - DRIVE: INPHASE ENGINE WITH GEARBOX 24 V, NET CONNECTION ALTERNATE VOLTAGE 230-240 V, WATTAGE 0,2 kW</p>	1	0	1	SECTIONAL GARAGE DOOR RAL 6032 - SIGNAL GREEN	
4 D	ONEWING INTERNAL DOOR, DOOR DIMENSION 900x2000 mm, BUILDING HOLE 1100x2100 mm, LEFT OPENING, WITHOUT GLAZED  <p>OTHER PARAMETERS:            - ALUMINIUM DOOR FRAME, SURFACE FINISH KOMAXIT            - ALUMINIUM DOOR WING UNGLAZED (FULL)            - FITTING: BALL/HANDLE            - LOCK: MAGNETIC LOCK CONNECTED ON PSS</p>	0	1	1	ALUMINIUM DOOR RAL 1028 - YELLOW ALUMINIUM DOOR FRAME RAL 9005 - BLACK	

Prepared by M. Šaár

Checked by Z. Vaněček

File 016\_dd\_list of doors\_windows\_civil\_nik6.6 a.dwg

Drawing title

LIST OF DOORS AND WINDOWS

Drawing type

STAR



ÚJV Řež, a. s.  
Hlavní 130, Řež  
250 68 Husinec

ENERGOPROJEKT  
PRAHA

Archive no.

5043-D-181796

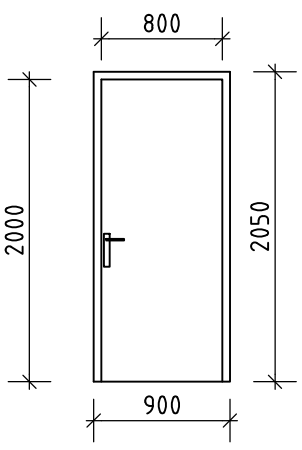
Sheet

3/5

Index

A4 1A4 297x210

# LIST OF THE DOORS

TERM	DESCRIPTION SCHEMA, DIMENSION	NO. PCS			COATING HUE	NOTE
		+0,600	,	TOTAL		
1	2	3	4	5	6	7
5 D	<p>ONEWING INTERNAL DOOR, DOOR DIMENSION 800x2000 mm, BUILDING HOLE 900x2050 mm, RIGHT OPENING, WITHOUT GLAZED</p>  <p>OTHER PARAMETERS:            - ALUMINIUM DOOR FRAME, SURFACE FINISH KOMAXIT            - DOOR WING HPL - LAMINATE (UNGLAZED - FULL)            - FITTING: HANDLE/HANDLE            - LOCK: DOOR PLUG FAB</p>	1		1	DOOR HPL - LAMINATE RAL 6032 - SIGNAL GREEN ALUMINIUM DOOR FRAME RAL 9005 - BLACK	

Prepared by M. Šaár

Checked by Z. Vaněček

File 016\_dd\_list of doors\_windows\_civil\_nik6.6.a.dwg

Drawing title

LIST OF DOORS AND WINDOWS

Drawing type

STAR



**ÚJV Řež, a. s.**  
Hlavní 130, Řež  
250 68 Husinec

**ENERGOPROJEKT  
PRAHA**

Archive no.



5043-D-181796

Sheet

4/5

Index

# LIST OF THE DOORS

TERM	DESCRIPTION SCHEMA, DIMENSION	NO. PCS			COATING HUE	NOTE
		-3,000	+0,600	TOTAL		
1	2	3	4	5	6	7
1 W	<p>FIXED WINDOW, DIMENSION 1200/1200 mm,</p>  <p>PARAMETERS: - WINDOW FRAME: ALUMINIUM (Al) - SURFACE FINISH: COATING - KOMAXIT - GLAZING: DOUBLE GLASS 4-16-4 mm - OPENING: FIXED (UNOPENABLE)</p>	6	8	14	GREY COLOR	WINDOWS IN CONTROL HUTCH + SAMPLE PREPARATION AREA
2 W	<p>FIXED WINDOW, DIMENSION 1200/1200 mm,</p>  <p>PARAMETERS: - WINDOW FRAME: ALUMINIUM (Al) - SURFACE FINISH: COATING - KOMAXIT - GLAZING: DOUBLE GLASS 4-16-4 mm - OPENING: FIXED (UNOPENABLE)</p>	-	1	1	GREY COLOR	WINDOWS IN CONTROL HUTCH + SAMPLE PREPARATION AREA

Prepared by M. Šaár

Checked by Z. Vaněček

File 016\_dd\_list of doors\_windows\_civil\_nik6.6 a.dwg

Drawing title

LIST OF DOORS AND WINDOWS

Drawing type

STAR



**ÚJV Řež, a. s.**  
Hlavní 130, Řež  
250 68 Husinec

**ENERGOPROJEKT  
PRAHA**

Archive no.

5043-D-181796

Sheet

5/5

Index